# This Page is Inserted by IFW Indexing and Scanning Operations and is not part of the Official Record

# BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

| BLACK BORDERS
| IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
| FADED TEXT OR DRAWING
| BLURRED OR ILLEGIBLE TEXT OR DRAWING
| SKEWED/SLANTED IMAGES
| COLOR OR BLACK AND WHITE PHOTOGRAPHS
| GRAY SCALE DOCUMENTS
| LINES OR MARKS ON ORIGINAL DOCUMENT
| REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
| OTHER:

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

### **PCT**

# WORLD INTELLECTUAL PROPERTY ORGANIZATION International Bureau



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> :		(11) International Publication Number: WO 99/57637			
G06F 9/46	A1	(43) International Publication Date: 11 November 1999 (11.11.99)			
(21) International Application Number: PCT/GB (22) International Filing Date: 27 April 1999 (		(AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT,			
(30) Priority Data: 9809512.8 1 May 1998 (01.05.98)	C	GB Published With international search report.			
(71) Applicant (for all designated States except US): TELECOMMUNICATIONS PUBLIC LIMITED PANY [GB/GB]; 81 Newgate Street, London E (GB).	D COI	M-			
(72) Inventors; and (75) Inventors/Applicants (for US only): LEBRE, Caroli Michele [FR/GB]; 7 High View House, Dykloswich, Suffolk IP1 3NB (GB). TITMUS, Rich [GB/GB]; 27 King Edward Road, Ipswich, Suffolk (GB).	es Stre ard, Jo	eet,			
(74) Agents: READ, Matthew, Charles et al.; Venner, S. Co., 20 Little Britain, London EC1A 7DH (GB).	Shipley	· &			

#### (54) Title: DISTRIBUTED DATA PROCESSING

#### (57) Abstract

Data is processed in a distributed environment, using client and server objects. The server object (MS1) is mobile and can be serialised under control of a proxy (prI) and moved from a first place (PI) to a second place (P2). During relocation, calls to the mobile server are frozen and redirected to the new location when the server becomes ready for use at the second place (P2).

#### FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

Al.	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
ΛT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
вв	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav	TM	Turkmenistan
BF	Burkina Faso	GR	Greece		Republic of Macedonia	TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukrainc
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	us	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NI.	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	zw	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denniark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

## Distributed data processing

#### Field of the invention

This invention relates to a processing data in a distributed computing environment.

- 1 -

#### Background

Data processing may be carried out in a distributed computing environment in which client software interacts with server software, connected in a network. A server can be considered to have a resource which is to be shared with a number of clients which have an interest in it. The server waits for client initiated requests and replies to them individually with information derived from the resource requested by the client.

Conventionally, the client software is located at fixed workstations connected in the network, which interacts with servers at fixed locations. More recently, mobile agent software has been developed which allows the client software to move to a location close to a server in order to make better use of the facilities of the server. For example, if a manufacturing company has factories at two different locations, with their own local computer networks, an operator at the first location may wish to interrogate databases of servers at both locations to determine e.g. the availability of certain stock items which may be held in warehouses at the two locations. In this situation, it is convenient for the client data interrogation software to migrate from the first location to the second location in order to be close to the server at the second location, to enable the associated databases to be interrogated efficiently. The mobile client software is known as a mobile agent.

A number of different systems which provide mobile agents have been developed: MuBot by Crystaliz, Inc., Agent Tcl by Dartmouth College, Aglets by IBM, MOA by the Open Group Inc, GMAF/Magna by GMD Fokus and Odyssey by General Magic Inc.

Summary of the invention

In accordance with the invention, it has been appreciated that there are situations in which it would be advantageous to make the server mobile within a distributed computing environment.

- 2 -

In accordance with the invention there is provided a method of processing data in a distributed computing environment wherein a client and a server process data, the method comprising sending the server from a first place where it communicates with the client, through the distributed computing environment towards a second different place to perform data processing therefrom.

The method may include freezing incoming calls for data processing to the server at the first place whilst the server is being sent from the first place to the second place, and thereafter directing the frozen calls towards the second place to be processed by the server when it has become functional at the second place.

This has the advantage of ensuring that connections are not lost to the server whilst it moves from the first place to the second place.

In another aspect, the invention includes, at the second place, receiving the server sent from the first place in order to perform data processing at the second place.

In order to transmit the server from the first place to the second place, it may be converted from an operational configuration at the first place into a configuration suitable for transmission through the distributed environment to the second place. The conversion may comprise serialisation of the server.

The invention also includes a software entity operable to provide a server for a

client in a distributed computing environment characterised in that the software
entity is selectively re-locatable to different places through the environment.

- 3 -

In another aspect, the invention includes a signal for transmission in a distributed computing environment wherein a client and a server process data, the signal comprising the server serialised for transmission between a first place where it communicates with the client, through the distributed computing environment and a second different place to perform data processing.

The transmission of the server from the first place towards the second place may be controlled by a proxy and more particularly, the invention includes a proxy for use in a distributed computing environment wherein a client and a server process data, the proxy being operable to send the server from a first place where it communicates with the client, through the distributed computing environment towards a second different place to perform data processing.

#### Brief description of the drawings

In order the invention may be more fully understood, an embodiment thereof will now be described way of example with reference to the accompanying drawings, in which:

Figure 1 is a schematic block diagram of a distributed computing environment which uses mobile software agents;

Figure 2 is a more detailed diagram of one of the hosts shown in Figure 1;
Figure 3 illustrates schematically the moving of a mobile server from a first place to a second place in accordance with the invention; and
Figure 4 is a schematic timing diagram of signal communication between the first place and the second place in respect of the movement of the server.

#### Detailed description

25

In the following description, the terminology adopted by the Object
Management Group (OMG) for mobile agents has been adopted by way of
convenient explanation. The OMG has defined a common standard for
interoperability of objects between different systems under a common object
management architecture that provides an object request broker known
commercially as CORBA which provides an infrastructure allowing objects to

converse independently of the specific platforms and techniques used to implement the objects. In order to deal with interoperability of mobile agents, the OMG has produced a document "Mobile Agent Facility Specification" 1st September 1997, OMG TC Document orbos/97-09-20, available from the

. 4 .

5 Object Management Group, 492 Old Connecticut Path, Framingham, MA 01707, USA. Members of OMG can also find the full specification at the following URL:

http://www.omg.org/library/schedule/Mobile\_Agents\_Facility\_RFP.htm.
This will now be explained with reference to Figures 1 and 2.

For mobile software agents, which are clients, the world is made up of regions which include places between which the mobile agent can move. Referring to Figure 1, first and second host computing systems 1, 2 are interconnected by a network 3. The first and second host systems can be of any suitable form e.g. local area networks, individual computers and the like, which each operate with their own operating system OS1, OS2. In a conventional manner, the individual hosts 1, 2, may include one or more computers or processors, each of which include a processor, volatile working memory and non-volatile data storage. Each host is provided with a communications interface CI1, CI2 to allow communication between them via the network 3. The network 3 can be of any suitable form, for example a wide area network, a local area network, intranet or Internet.

Considering the host 1, its operating system OS1 provides an environment in
which software can operate. The client software is configured as mobile
software agent MA1. Similarly, the host 2 has an operating system OS2 and a
mobile agent MA2. A further mobile agent MAn is shown in host 1. Each
mobile agent MA is operative at a place P. Thus, considering the host 1, mobile
agent MA1 is operative at place P1 and mobile agent MAn is operative at place
Pn. Mobile agent MA2 is at place P2 in host 2. The mobile agents can move from
place to place. It will be understood that in host 1, the places P may be
individual computers connected in a network that comprises host 1 or any other

suitable hardware configuration, which will not be described further herein. The same is true for host 2. The OMG mobile agent specification is designed to provide interoperability between different operating systems in order to allow transport of mobile client agents from one host to another. It is assumed in the configuration of Figure 1 that different operating systems OS1, OS2 are in use although this is not an essential feature of the invention. It will be appreciated that the OMG specification makes use of CORBA to allow interoperability between different hardware and software configurations. The agents operating within the operating system OS1 define an agent system AS1 in host 1. A similar agent system AS2 operates in host 2 shown in Figure 1.

The software process is arranged in a client-server configuration as will now be explained with reference to Figure 2. Conveniently, but not necessarily, the software may be object oriented such that the mobile client agents and the servers can each be considered as objects. As shown in Figure 2, server software MS 1 is shown at place P1 which can service calls from the mobile clients described with reference to Figure 1. For example, the mobile agent MA1 is a client at place P1 and can make data calls on the server MS 1 over path 4 to perform data processing. The client and server do not however need to be located at the same place P. Thus, in the example of Figure 2, the server MS1 can service data calls from mobile client agent MA 2 at place P2 over communication path 5. It will be understood that there may be more than one server MS in the distributed computing environment.

In accordance with the invention, the server MS 1 is mobile within the distributed computing environment. In order to manage the mobility of the mobile server MS 1, it is given a software proxy pr 1 which is different in each place P. The proxy pr 1 is advertised to CORBA with the mobile server interface, instead of the mobile server itself. All processing calls for the server go to the proxy first and are then redirected by it to the server. Therefore, the proxy pr 1 knows at all times how many clients are connected to the server MS 1 and how many calls are in progress.

- 6 -

Referring to Figure 3, there are situations where it would be convenient to move the server agent MS1 from place P1 to place P2 via the communication interface C11, network 3 and interface C12. For example, the server MS 1 could then function with enhanced operability with client MA 2 residing in the agent system AS2 in host 2. The transfer of the server MS 1 from place P1 to place P2 will now be described in detail with reference to Figure 4.

Initially, when the mobile server MS 1 decides or is told to move from place P1, at step S.0, it tells its proxy pr1 the place to which it is to be moved. In this case, the mobile server MS1 is to be moved to place P2. Alternatively, the proxy pr1 may be told by some external third party to move the mobile server. The moving process then starts.

15 At step S.1, the proxy pr1 freezes all incoming calls for data processing to the mobile server MS 1.

At step S.2, the proxy pr1 waits until all current data processing handled by mobile server MS 1 has finished.

Then, at step S.3, the proxy pr1 tells mobile server MS 1 that it is about to be moved and that it must perform any task needed to be completed before leaving place P1.

Then, at step S.4, the proxy causes the mobile server MS 1 to be serialised, namely to convert it from its operational state into a condition suitable for transmission through the network 3 (Figure 1).

Then, at step S.5, the serialised mobile server is sent to the place P2 of host 2 via communications interface CI1, network 3 and communications interface CI2.

At step S.6, a new proxy pr1' is produced in place P2 for the mobile server MS1

5

when located in place P2.

At step S.7, the mobile server MS1 is de-serialised at place P2 and thereby recreated in an operational condition.

At step S.8, the newly created proxy pr1' sends back locational reference data for mobile server MS1, so as to indicate to the proxy pr1, the new CORBA reference of mobile server MS1.

Then, at step S.9, the calls frozen at step S.1 are forwarded to the mobile server MS1 through the network 3, by proxy pr1, from place P1 to place P2.

The procedure described with reference to Figure 4 has the advantage that communication with the mobile server MS 1 is not lost during the transfer process. The steps ensure that any data processing carried out at place P1 is completed before the transfer occurs and, whilst the transfer is taking place, incoming calls are frozen and then transferred to the new place.

Clients can find the moved mobile server MS 1 by making an appropriate request, as for any other CORBA object, and will receive the reference of its proxy. The proxy that is advertised for the mobile agent can either be the first one pr1, in which case calls will be directed from pr1 to pr1', or pr1' itself.

At the completion of the moving process for the mobile server, the proxy pr 1 is no longer needed and is cancelled.

It will be understood that client agents such as agent MA2 shown at place P1 in Figure 3 can be mobile in a conventional manner, in accordance with the OMG specification for mobile agents. Thus, client agent MA2 can be moved in a conventional manner by serialising the agent, transmitting it through the network 3 to a different place and de-serialising the agent at the new place. Thus, it is possible according to the invention to move an entire client - server

WO 99/57637 PCT/GB99/01302

- 8 -

combination from one place to another or to different places.

It will be understood that the mobile server MS1 when at a particular place, will reside in the working memory of a particular computer within the host, and may if required be stored in the non-volatile memory of the computer associated with the place P, to provide a record thereof if the network or a part thereof is shut down. The mobile server may also be provided on a storage medium such as an optical or magnetic disc, so that it can be loaded into a computer at a particular place P, and then commence its mobile activities in the network.

10

Whilst the previously described clients and servers may conveniently be configured as software objects in an object oriented environment, this is not essential and they can be configured as batches of conventional code. Also, whilst the invention has been described in relation to CORBA object management architecture, other management architectures could be used such as OLE by Microsoft, suitably configured to handle mobile objects

Movement of the server in accordance with the invention renders the computing process much more flexible. For example in an Internet application, if a large number of clients in the United Kingdom are calling a server which is located at a place in the USA, a large number of transatlantic calls would need to be set up, leading to inefficiencies. In accordance with the invention, the server object can migrate from a place in the USA to a place in the United Kingdom, speeding up execution of the individual client/server processes.

Claims

1. A method of processing data in a distributed computing environment

5 wherein a client and a server process data, the method comprising sending the

5 server from a first place where it communicates with the client, through the

6 distributed computing environment towards a second different place to perform

6 data processing therefrom.

.9.

10 2. A method according to claim 1 including freezing incoming calls for data processing to the server at the first place whilst it is being sent from the first place to the second place, and thereafter directing the frozen calls towards the second place to be processed by the server when it has become functional at the second place.

3. A method according to claim 2 including waiting for the server to complete its current processing tasks before sending it to the second place.

- 4. A method according to any preceding claim including converting the

  20 server from an operational configuration at the first place into a configuration

  suitable for transmission through the distributed environment to the second


  place.
- 5. A method according to claim 4 wherein the conversion comprises serialisation of the server.
  - 6. A method according to any preceding claim including creating a proxy for the server at the first place, which controls the sending of the server towards the second place.
  - 7. A method according to any preceding claim including sending the client towards a different place in the distributed computing environment.


- 8. A method of processing data in a distributed computing environment wherein a client and a server process data, the method comprising receiving the server sent from a first place where it communicated with the client, through the distributed computing environment, at a second different place, to perform data processing at the second place.
- 9. A method according to claim 8 wherein the server is received at the second place in a form suitable for transmission through the distributed environment, and including converting the received server at the second place into a form suitable for processing data at the second place.
  - 10. A method according to claim 9 wherein the converting includes descrialising the server.
  - 11. A method according to claim 8, 9 or 10 including producing a proxy for the received server, at the second place.
- 12. A method according to any one of claims 8 to 11 including receiving at the second place, data processing calls for the server directed thereto from the first place after the server has become operational at the second place.
- 13. A software entity operable to provide a server for a client in a distributed computing environment characterised in that the software entity is selectively re-locatable to different places through the environment.
  - 14. An entity according to claim 13, operable to function as the server at a first place in the environment and then to re-locate and function as the server at a second place in the environment.
  - 15. An entity according to claim 13 or 14, operable such that data calls thereto from a client are frozen during the re-location.


- 16. An entity according to any one of claims 13 to 15 operable to provide a proxy functional to send the server through the environment to achieve the relocation.
- 17. An entity according to claim 16 wherein the proxy is functional to wait for the server to complete its current processing tasks before commencing the relocation.
- 10 18. An entity according to claim 16 or 17 wherein the proxy is operable to serialise the server from its functional configuration into a configuration suitable for transmission through the distributed environment so as to achieve the relocation.
- 15. A software entity according to any one of claims 13 to 18, stored on a storage medium.
- 20. A signal for transmission in a distributed computing environment wherein a client and a server process data, the signal comprising the server serialised for transmission between a first place where it communicates with the client, through the distributed computing environment and a second different place to perform data processing.
- 21. A proxy for use in a distributed computing environment wherein a client and a server process data, the proxy being operable to send the server from a first place where it communicates with the client, through the distributed computing environment towards a second different place to perform data processing.
- 22. A proxy according to claim 21 operable to freeze incoming calls for data
  30 processing to the agent at the first place whilst it is being sent from the first place
  to the second place, and thereafter to direct the frozen calls towards the second
  place to be processed by the server when it has become functional at the second


place.

- 23. A proxy according to claim 21 or 22 operable to wait for the server to complete its current processing tasks before sending it to the second place.
- 24. A proxy according to claim 21, 22 or 23 operable to serialise the server from an operational configuration at the first place into a configuration suitable for transmission through the distributed environment to the second place.
- 10 25. A host provided with client and server objects for processing data in an object oriented distributed processing environment characterised in that the server object is selectively re-locatable to different places in the environment.
- 26. A host according to claim 25 wherein the mobile server object is operable such that data calls thereto are frozen during the relocation.
  - 27. A host according to claim 25 wherein the server is provided with a proxy compatible with CORBA or OLE architecture.
- 28. A server object for processing data in an object oriented distributed processing environment characterised in that the server object is re-locatable for operation at different places and is provided in use with a proxy which freezes data calls thereto during the relocation and subsequently forwards them to the moved server object.

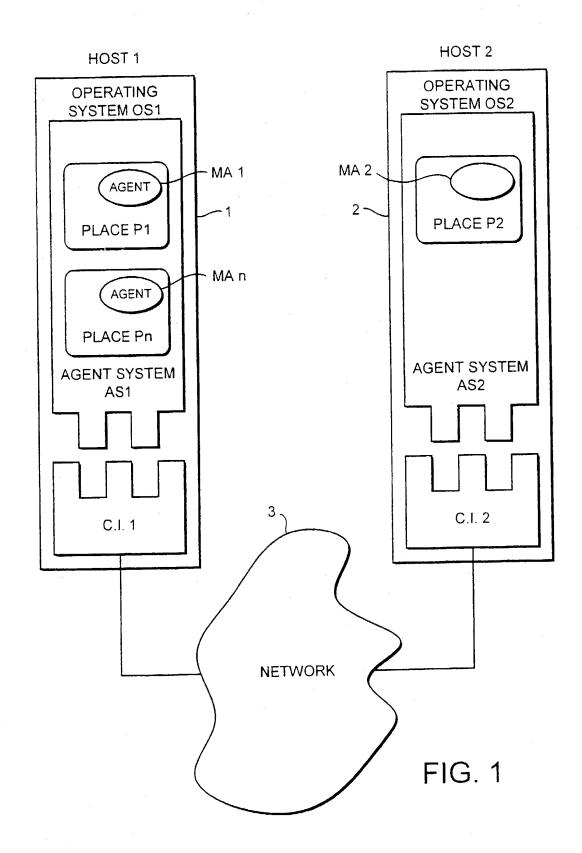

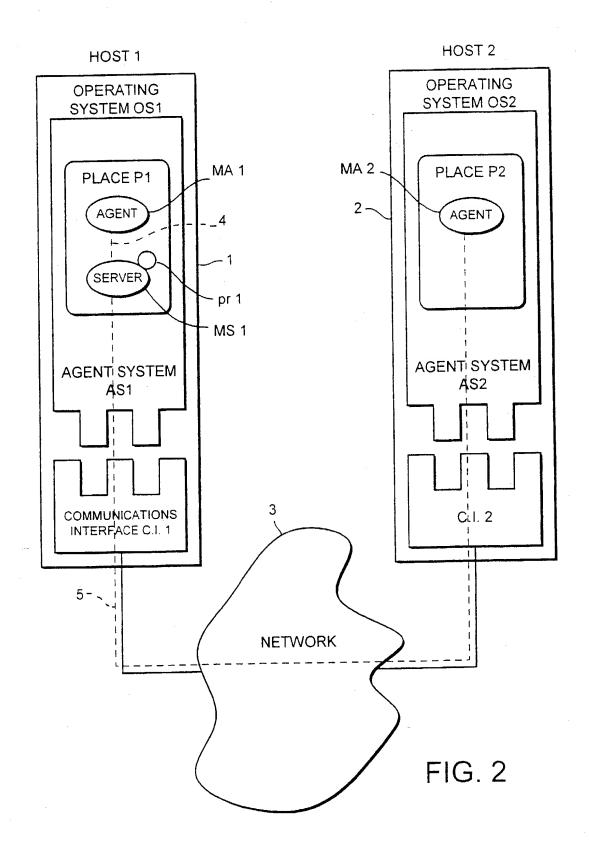

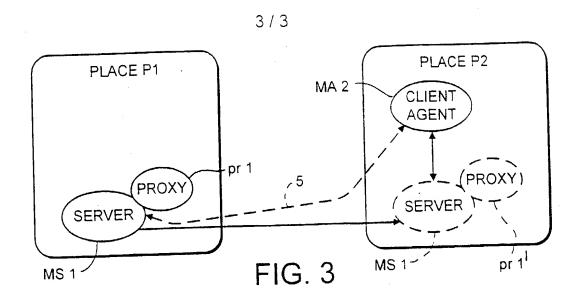

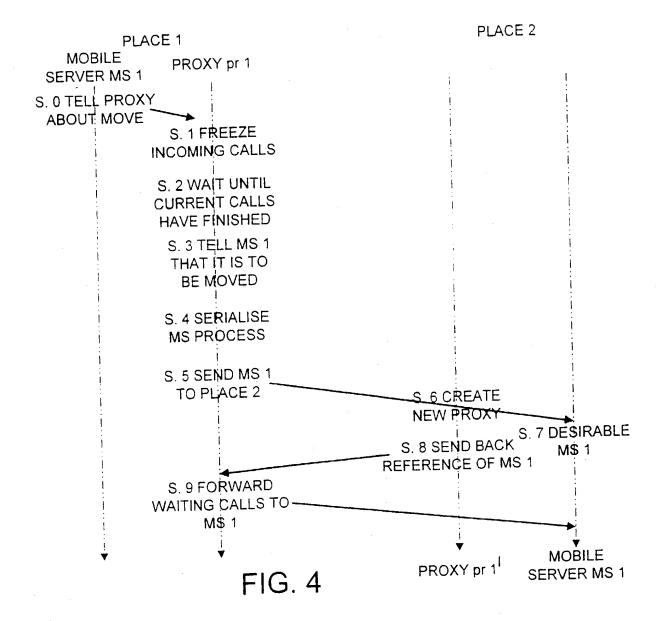

## INTERNATIONAL SEARCH REPORT

Inte. utional Application No PCT/GB 99/01302

	IFICATION OF SUBJECT MATTER G06F9/46			
	to International Patent Classification (IPC) or to both national cla	ssification and IPC		
	SEARCHED ocumentation searched (classification system followed by class	dication symbols)		
IPC 6	G06F			
Documenta	ation searched other than minimum documentation to the extent	that such documents are included in the fields so	earched	
Electronic	data base consulted during the international search (name of da	ata base and where practical search terms used	i)	
Ciectionio		,		
	·			
C DOCUM	IENTS CONSIDERED TO BE RELEVANT			
Category °	Citation of document, with indication, where appropriate, of t	he relevant passages	Relevant to claim No.	
Α	BERGHOFF J ET AL: "Agent-base	ed .	1-28	
, ,	configuration management of di		E.	
	applications"	14.1	·	
	PROCEEDINGS. THIRD INTERNATION CONFERENCE ON CONFIGURABLE DIS			
	SYSTEMS (CAT. NO.96TB100046),			
	OF INTERNATIONAL CONFERENCE OF	•		
	CONFIGURABLE DISTRIBUTED SYSTE	EMS,		
	ANNAPOLIS, MD, USA, 6-8 MAY 19			
	52-59, XP002086942 ISBN 0-8186-7395-8, 1996, Los	Alamitos.		
	CA, USA, IEEE Comput. Soc. Pre	ess, USA		
	the whole document			
٨	WO 97 47091 A (ADOBE SYSTEMS )	(NC)	1,8,13,	
А	11 December 1997 (1997-12-11)	inc )	14,20,	
	11 bedember 1557 (1557 12 12)		25,28	
	the whole document			
		-/		
		,		
χ Fur	ther documents are listed in the continuation of box C.	Patent family members are listed	I in annex.	
Special c	ategories of cited documents :	"T" later document published after the inter-		
	nent defining the general state of the art which is not	or priority date and not in conflict with cited to understand the principle or th		
considered to be of particular relevance invention  "E" earlier document but published on or after the international "X" document of particular relevance, the claimed invention				
fiting "L" docum	date nent which may throw doubts on priority claim(s) or	cannot be considered novel or canno involve an inventive step when the di	t be considered to	
which	h is cited to establish the publication date of another on or other special reason (as specified)	"Y" document of particular relevance; the cannot be considered to involve an in		
"O" docum	nent referring to an oral disclosure, use. exhibition or	document is combined with one or m ments, such combination being obvio	ore other such docu-	
"P" document published prior to the international filing date but				
	than the priority date claimed  a actual completion of the international search	Date of mailing of the international se		
		29/07/1999		
	22 July 1999	73/01/1333		
Name and	mailing address of the ISA  European Patent Office, P.B. 5818 Patentiaan 2	Authorized officer		
	NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl. Fax: (+31-70) 340-3016	Fonderson, A		

Form PCT/ISA/210 (second sheet) (July 1992)

## INTERNATIONAL SEARCH REPORT

International Application No PCT/GB 99/01302

	TO DE DEI EVANT	PCT/GB 99	7 013 02	
	Citation of document, with indication, where appropriate, of the relevant passages		Relevant to claim No.	
ategory "	Citation of document, with indication, where appropriate, of the felovative passages	•		
1	RAVI T M ET AL: "A basic protocol for routing messages to migrating processes" PROCEEDINGS OF THE 1988 INTERNATIONAL CONFERENCE ON PARALLEL PROCESSING, UNIVERSITY PARK, PA, USA, 15-19 AUG. 1988, pages 188-197 vol.2, XP002090982 ISBN 0-271-00654-4, 1988, University Park, PA, USA, Pennsylvania State Univ, USA the whole document		1.2, 13-15, 21,22, 25,26,28	
	_	•		
	*			

## INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No PCT/GB 99/01302

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
WO 9747091	Α	11-12-1997	US AU	5838909 A 3145897 A	17-11-1998 05-01-1998

Form PCT/ISA/210 (patent tamily annex) (July 1992)

